



PRIVATE & PUBLIC ROADS
INFRASTRUCTURE
PARKING PLACES
PUBLIC SPACES

BARRIERS

MANUAL ROAD BARRIERS

Halsang manual road barriers offers an easy and cost effective vehicle entrance solution. The barriers are available as either lift/rising- or swing barriers.

ADVANTAGES

DURABILITY

The barriers are produced in hot dip galvanized steel (in accordance with EN ISO 1461). The construction is very solid and the barriers are developed for Nordic climate.

EASY AND FAST INSTALLATION

Fully pre-assembled when delivered allowing an easy and fast installation on site.

HIGH QUALITY

Our high quality products offers long life time, resulting in a financially good investment for the customer.



Hot Dip Galvanized



LIFT/RAISING BARRIER 3-5 M



Counter weight.



Adjustable arm length.

TECHNICAL DESCRIPTION

LIFT/RAISING BARRIERS

Produced in HDG steel. The barrier arm and posts are equipped with reflex (red/yellow). Counter weight adapted for opening width 3-5 m. The barrier arm can be locked both in open and closed position. The posts welded on a base plate for direct fixation on concrete foundation.

Guiding post	2 pcs 100x50 mm
End post	60x60 mm
Height	1 000 mm
Barrier arm	Ø 62 mm
Weight	95 kg

OPTIONS

- Other RAL colors on request.



LIFT/RAISING BARRIER 5–7 M

TECHNICAL DESCRIPTION

LIFT/RAISING BARRIERS

Produced in HDG steel. The barrier arm and posts are equipped with reflex (red/yellow). Counter weight adapted for opening width 5-7 m. The barrier arm can be locked both in open and closed position. The posts welded on a base plate for direct fixation on concrete foundation.


Guiding post	2 pcs 120x80 mm
End post	60x60 mm
Height	1 000 mm
Barrier arm	70x70 mm + Ø 60 mm + Ø 48 mm
Weight	230 kg

OPTIONS


- Other RAL colors on request.



Guiding post.

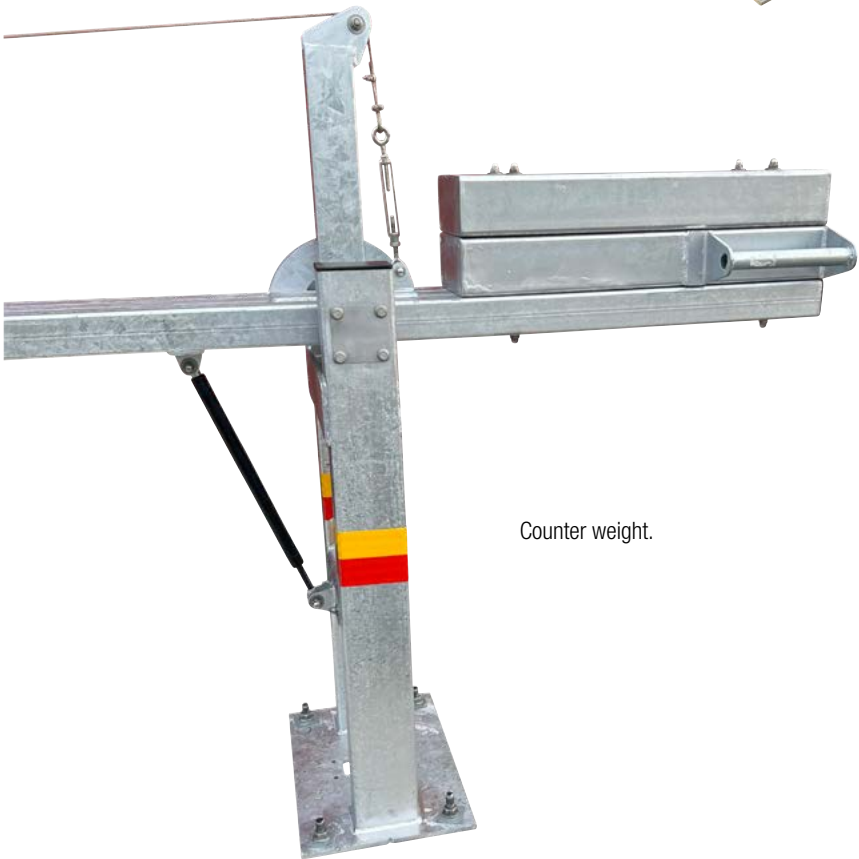

Counter weight.

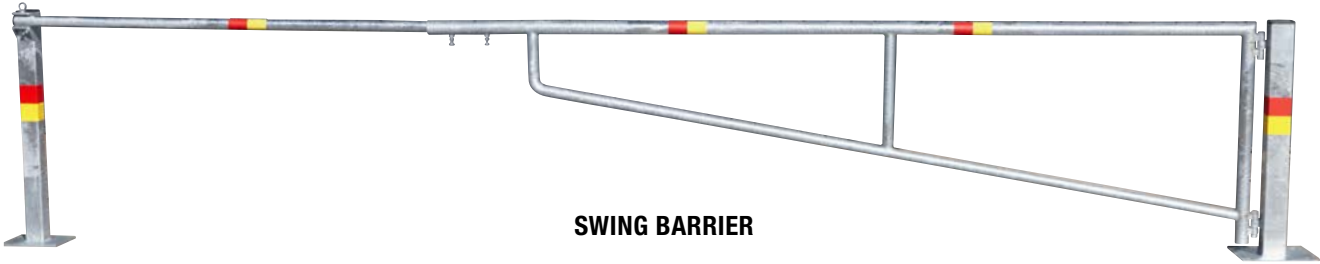

SWING BARRIER



Adjustable arm length.

TECHNICAL DESCRIPTION

SWING BARRIERS

Produced in HDG steel. The barrier arm and posts are equipped with reflex (red/yellow). The barrier arm is adjustable for opening width 3-6m. For wider openings - double barrier installations are possible.

The barrier arm can be locked in closed position. If locked in open position is requested an additional end post/posts needs to be ordered.

The posts are welded on a base plate for direct fixation on concrete foundation.

Guiding post	100x100mm
End post	80x80mm
Height	1 000mm
Barrier arm	Ø 72 mm, adjustable arm Ø 52 mm
Weight	65 Kg

OPTIONS

- Other RAL colors on request.